





**bt family
does it all**

- CHANGE COLOR TEMPERATURES
- DIM
- GROUP
- CHANGE RGB COLORS
- CREATE CUSTOM SCENES FOR HOLIDAYS AND EVENTS
- CREATE SECURED NETWORKS
- PHONE APP DRIVEN

DOWNLOAD THE BT APP:



App Store



iOS QR Code



Google play



Android QR Code

bt

Visit our online video library to
learn more about the bt family of products.
www.allianceoutdoorlighting.com/bt-support

BL200-bt

bt Bullet Light

- Cast brass fixture, aged brass finish
- Cast brass knuckle with dial adjustment
- Fully adjustable brass shroud
- Clear glass convex lens
- Double wire lead pre-connected to the fixture, 16 awg (UL listed), brown
 - 25 foot wire lead, pre-stripped for easy wire connection
 - 18 inch wire lead, LED connection ready
- Plastic ground stake (8.5 in; 21.6 cm length)
- Ten year warranty

Integrated LED Features:

- Wattage: 4-8
- Operating Voltage Range: 10 -14
- Lumen Output: 15 - 350
- Beam Spread: 40°
- CRI: 80
- CCT Options: Preset options for 2700K, 3000K, 4000K
- RGB Options: Unlimited Color Wheel Options with quick preset options
- Dimming: Dimming option available for every color choice
- Scenes: Customizable scene options with up to 3 colors per scene



**Original bt with
improved color range**

bt-RE

bt Range Extender

- Cast brass fixture, aged brass finish
- 5 db external antenna
- LED network indicator light
- 10 Foot wire lead, 16 awg (UL listed), brown, pre-connected to the fixture, pre-stripped for easy wire connection
- Plastic ground stake (8.5 in; 21.6 cm length)
- Ten year warranty



GET YOUR FIXTURES TALKING!

The bt system uses Bluetooth Mesh technology to communicate. The mesh network becomes stronger with more devices in the same network. A distance gap between fixtures can cause a loss of communication. To ensure that all of your fixtures communicate with each other, install a bt Range Extender to each network on every job no matter how big or small.

**Don't install a bt
job without it.**



POWERFUL LUMEN OUTPUT

900 LUMENS OF LIGHT OUTPUT

The BL400-bt, FL200-bt and WL400-bt are the perfect fixtures for illuminating large or tall areas. The BL400-bt and WL400-bt are uplights that can light up tall palm trees and structures. The FL200-bt is a flood light with a 120° beam spread for ultimate wall washing ability. 900 lumens with all of the great bt features included makes these fixtures perfect for commercial projects.

BL400-bt

- Cast brass fixture, aged brass finish
- Cast brass knuckle with dial adjustment
- Fully adjustable brass shroud
- 25 Foot wire lead, 16 awg (UL listed), brown, pre-connected to the fixture, pre-stripped for easy wire connection
- Brass mounting bracket
- Ten year warranty on integrated fixture

Integrated LED Features:

- Wattage: 4-11
- Operating Voltage Range: 10 -14
- Lumen Output: 15 - 900
- Beam Spread: 40°
- CRI: 80
- CCT Options: Preset options for 2700K, 3000K, 4000K
- RGB Options: Unlimited Color Wheel Options with quick preset options
- Dimming: Dimming option available for every color choice
- Scenes: Customizable scene options with up to 3 colors per scene

WL400-bt

- bt Well Light
- ABS Composite Can
- Cast brass debris guard, aged brass finish with a clear glass lens
- Double wire lead pre-connected to the fixture, 16 awg (UL listed), brown
 - 25 foot wire lead, pre-stripped for easy wire connection
 - 18 inch wire lead, LED connection ready
- Ten year warranty on integrated fixture

Integrated LED Features:

- Wattage: 4-11
- Operating Voltage Range: 10 -14
- Lumen Output: 15 - 900
- Beam Spread: 40°
- CRI: 80
- CCT Options: Preset options for 2700K, 3000K, 4000K
- RGB Options: Unlimited Color Wheel Options with quick preset options
- Dimming: Dimming option available for every color choice
- Scenes: Customizable scene options with up to 3 colors per scene

FL200-bt

- bt Flood Light
- Cast brass fixture, aged brass finish
- Cast brass knuckle with dial adjustment
- Cast brass faceplate with clear glass lens and optional frosted lens
- Double wire lead pre-connected to the fixture, 16 awg (UL listed), brown
 - 25 foot wire lead, pre-stripped for easy wire connection
 - 18 inch wire lead, LED connection ready
- Ten year warranty on integrated fixture

Integrated LED Features:

- Wattage: 4-11
- Operating Voltage Range: 10 -14
- Lumen Output: 15 - 900
- Beam Spread: 120°
- CRI: 80
- CCT Options: Preset options for 2700K, 3000K, 4000K
- RGB Options: Unlimited Color Wheel Options with quick preset options
- Dimming: Dimming option available for every color choice
- Scenes: Customizable scene options with up to 3 colors per scene

FL50-bt

- Cast brass fixture, aged brass finish
- Cast brass knuckle with dial adjustment
- Brass faceplate with rubber gasket
- Clear glass lens
- Double wire lead pre-connected to the fixture, 16 awg (UL listed), brown
 - 25 foot wire lead, pre-stripped for easy wire connection
 - 18 inch wire lead, LED connection ready
- Plastic ground stake (8.5 in; 21.6 cm length)
- Ten year warranty

Integrated LED Features:

- Wattage: 2-5
- Operating Voltage Range: 10 -14
- Lumen Output: 15 - 350
- Beam Spread: 120°
- CRI: 80
- CCT Options: Preset options for 2700K, 3000K, 4000K
- RGB Options: Unlimited Color Wheel Options with quick preset options
- Dimming: Dimming option available for every color choice
- Scenes: Customizable scene options with up to 3 colors per scene




ALSTEM18-bt ALSTEM12-bt

bt Area Light Stem

- Brass stem, aged brass finish
- Brass collar
- Frosted Lens with rubber gasket
- Double wire lead pre-connected to the fixture, 16 awg (UL listed), brown
 - 25 foot wire lead, pre-stripped for easy wire connection
 - 18 inch wire lead, LED connection ready
- Plastic ground stake (8.5 in; 21.6 cm length)
- Ten year warranty on integrated fixture

*Note: Area light hats are sold separately
Compatible with AL100, AL150, AL250, AL300, AL400, AL500, and AL550

- Integrated LED Features:
- Wattage: 2-6
 - Operating Voltage Range: 10 -14
 - Lumen Output: 15 - 350
 - Beam Spread: 360°
 - CRI: 80
 - CCT Options: Preset options for 2700K, 3000K, 4000K
 - RGB Options: Unlimited Color Wheel Options with quick preset options
 - Dimming: Dimming option available for every color choice
 - Scenes: Customizable scene options with up to 3 colors per scene

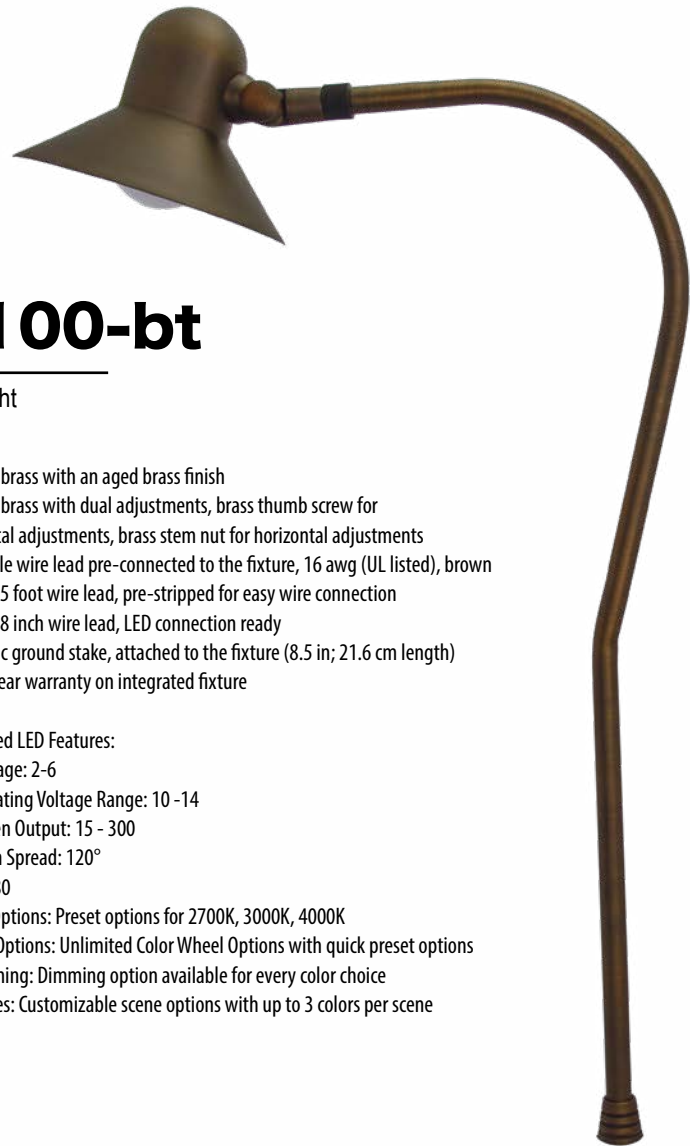

PL100-bt

bt Path Light

- Solid brass with an aged brass finish
- Solid brass with dual adjustments, brass thumb screw for vertical adjustments, brass stem nut for horizontal adjustments
- Double wire lead pre-connected to the fixture, 16 awg (UL listed), brown
 - 25 foot wire lead, pre-stripped for easy wire connection
 - 18 inch wire lead, LED connection ready
- Plastic ground stake, attached to the fixture (8.5 in; 21.6 cm length)
- Ten year warranty on integrated fixture

- Integrated LED Features:
- Wattage: 2-6
 - Operating Voltage Range: 10 -14
 - Lumen Output: 15 - 300
 - Beam Spread: 120°
 - CRI: 80
 - CCT Options: Preset options for 2700K, 3000K, 4000K
 - RGB Options: Unlimited Color Wheel Options with quick preset options
 - Dimming: Dimming option available for every color choice
 - Scenes: Customizable scene options with up to 3 colors per scene

PL300-bt

bt Path Light

- Brass stem with 90°, aged brass finish
- Frosted Lens
- Double wire lead pre-connected to the fixture, 16 awg (UL listed), brown
 - 25 foot wire lead, pre-stripped for easy wire connection
 - 18 inch wire lead, LED connection ready
- Plastic ground stake (8.5 in; 21.6 cm length)

- Integrated LED Features:
- Wattage: 1-3
 - Operating Voltage Range: 2-5
 - Lumen Output: 15 - 200
 - Beam Spread: 120°
 - CRI: 80
 - CCT Options: Preset options for 2700K, 3000K, 4000K
 - RGB Options: Unlimited Color Wheel Options with quick preset options
 - Dimming: Dimming option available for every color choice
 - Scenes: Customizable scene options with up to 3 colors per scene



CONTEMPORARY BT PATH LIGHT



COMING IN 2021

CHOOSE A BASE AND TOP

The GL100 and GL300 series both come with 6 tops to choose from. The GL300 is a larger ground light with a polycarbonate base and the smaller GL100 is solid brass with a double wire lead. Both come loaded with all of the great bt features:

GL100 Series Features:

- Cast brass fixture, aged brass finish
- Casted brass faceplate with 4 screws
- Clear glass lens with gasket
- Double wire lead pre-connected to the fixture, 16 awg (UL listed), brown
 - 25 foot wire lead, pre-stripped for easy wire connection
 - 18 inch wire lead, LED connection ready
- PVC Sleeve
- Ten year warranty

Faceplate Options:



Integrated LED Features:

- Wattage: 2-8
- Operating Voltage Range: 10 -14
- Lumen Output: 15 - 350
- Beam Spread: 40°
- CRI: 80
- CCT Options: Preset options for 2700K, 3000K, 4000K
- RGB Options: Unlimited Color Wheel Options with quick preset options
- Dimming: Dimming option available for every color choice
- Scenes: Customizable scene options with up to 3 colors per scene



GL100-bt

Faceplate with shroud and convex glass lens

GL150-bt

Faceplate with convex glass lens

HL100-bt



The shroud on the HL100 is easily extendable.

HL200-bt



DL200-bt



bt Down Lights

- Cast brass fixture, aged brass finish
- 25 Foot wire lead, 16 awg (UL listed), brown, pre-connected to the fixture, pre-stripped for easy wire connection
- Ten year warranty on integrated fixture

DL200-bt

- Cast brass knuckle with dial adjustment
- Fully adjustable brass shroud
- Brass mounting bracket

HL100-bt/HL200-bt

- Adjustable brass shroud (HL100)
- Twinkle-cut brass shroud (HL200)
- Solid brass chain ring with 18" Chain

Integrated LED Features:

- Wattage: 4-8
- Operating Voltage Range: 10 -14
- Lumen Output: 15 - 350
- Beam Spread: 40°
- CRI: 80
- CCT Options: Preset options for 2700K, 3000K, 4000K
- RGB Options: Unlimited Color Wheel Options with quick preset options
- Dimming: Dimming option available for every color choice
- Scenes: Customizable scene options with up to 3 colors per scene

GL300-bt

Faceplate with convex glass lens

GL350-bt

Faceplate with shroud and convex glass lens




GL300 Series Features:

- Solid brass faceplate with five screws
- Clear glass lens
- ABS fixture base with rubber gasket seal
- Ceramic bi-pin socket with adjustable swivel
- 5' wire lead, (UL Listed), black, pre-connected to the fixture, pre-stripped for easy wire connection
- Ten year warranty


Integrated LED Features:

- Wattage: 2-8
- Operating Voltage Range: 10 -14
- Lumen Output: 15 - 450
- Beam Spread: 40°
- CRI: 80
- CCT Options: Preset options for 2700K, 3000K, 4000K
- RGB Options: Unlimited Color Wheel Options with quick preset options
- Dimming: Dimming option available for every color choice
- Scenes: Customizable scene options with up to 3 colors per scene

Faceplate Options:

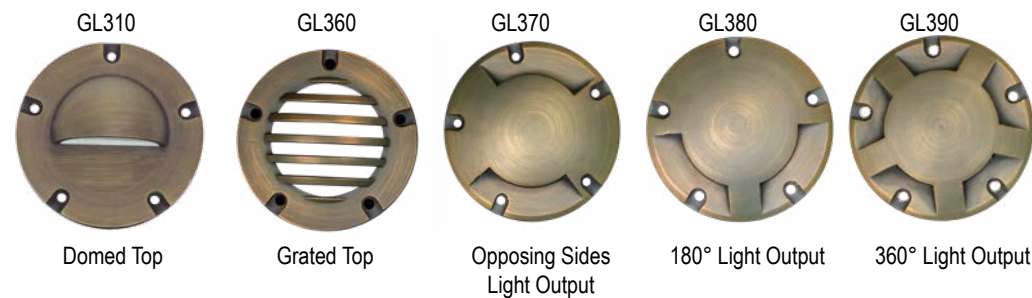

Gio Leonardo, Bella Terra Landscape Design
bellaterralandscapedesign

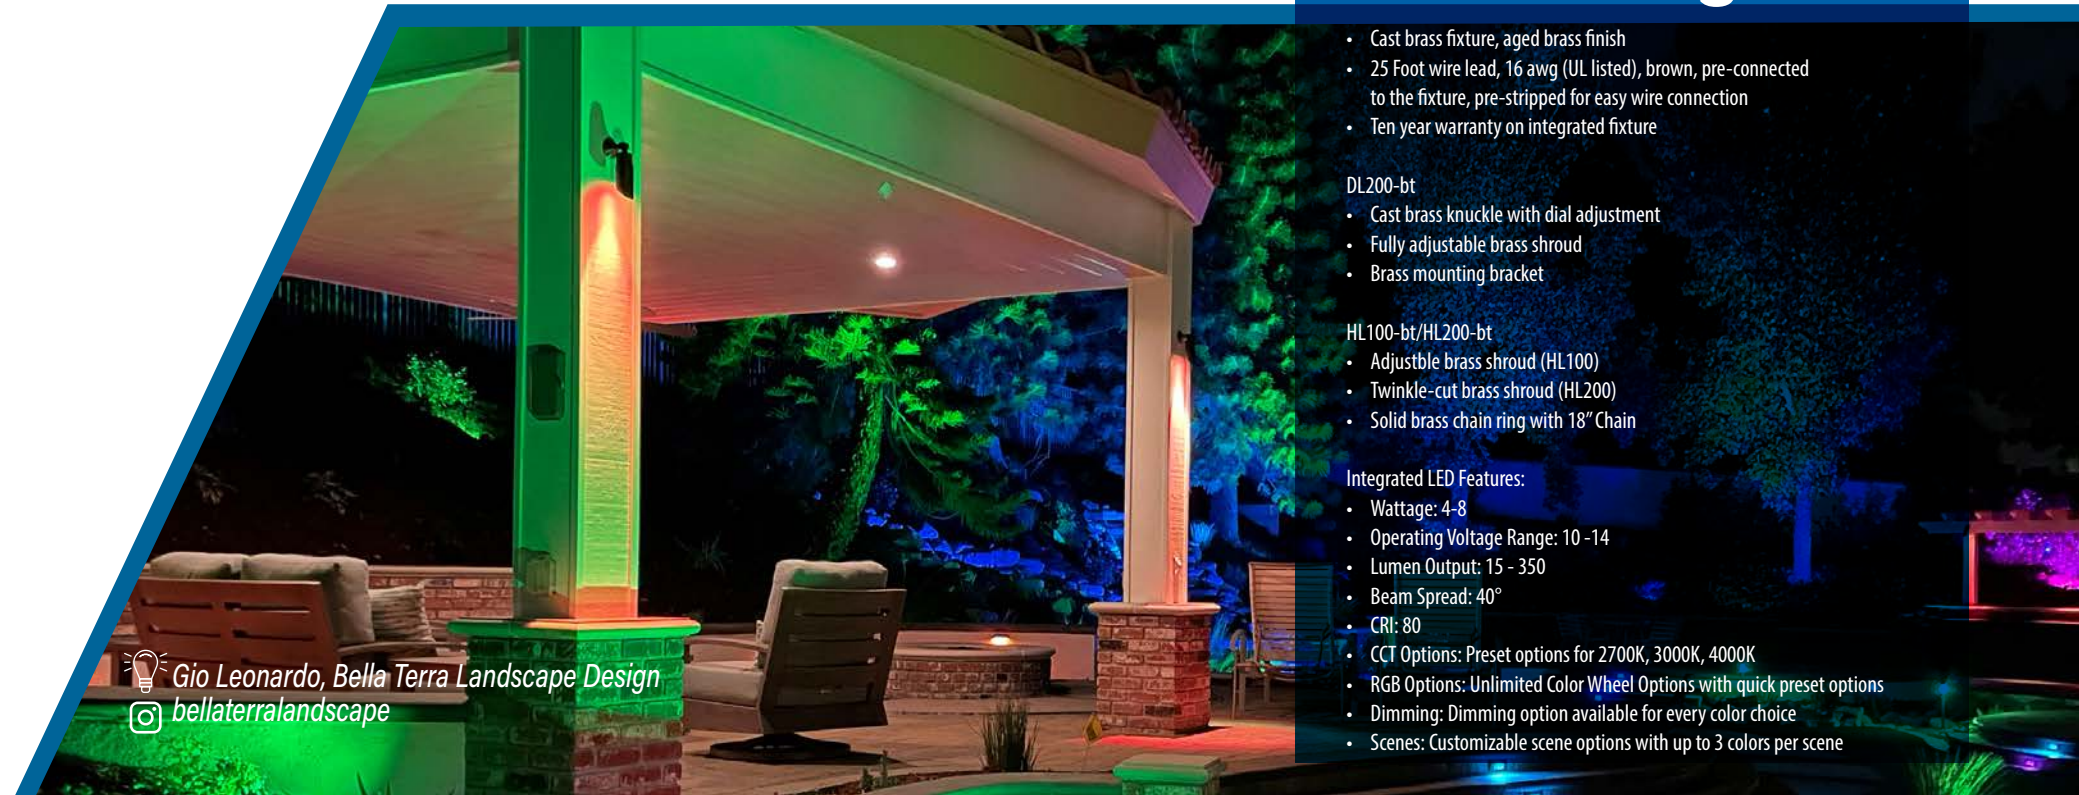

SL25-bt

bt Step Light



SL35-bt

bt Step Light



SL50-bt

bt Step Light



For mounting underneath a ledge or wall cap.

SL25-bt/SL35-bt Features:

- Brass fixture, aged brass finish
- Solid brass louvered face plate with frosted lens
- 25' Wire lead
- Ten Year warranty on integrated fixture

SL25-bt Integrated LED:

- Wattage: 1-4
- Operating Voltage Range: 10 -14
- Lumen Output: 15 - 200
- Beam Spread: 40°
- CRI: 80
- CCT Options: Preset options for 2700K, 3000K, 4000K
- RGB Options: Unlimited Color Wheel Options with quick preset options
- Dimming: Dimming option available for every color choice
- Scenes: Customizable scene options with up to 3 colors per scene
- *Louvered face plate greatly reduces glare

SL35-bt Integrated LED:

- Wattage: 2-5
- Operating Voltage Range: 10 -14
- Lumen Output: 15 - 300
- Beam Spread: 40°
- CRI: 80
- CCT Options: Preset options for 2700K, 3000K, 4000K
- RGB Options: Unlimited Color Wheel Options with quick preset options
- Dimming: Dimming option available for every color choice
- Scenes: Customizable scene options with up to 3 colors per scene
- *Louvered face plate greatly reduces lumen output

SL50-bt/SL60-bt Features:


- Brass fixture, aged brass finish
- Brass Mounting Plate (SL50-bt)
- Brass Surface Mount (SL60-bt)
- Frosted lens
- 25 Foot wire lead, 16 awg (UL listed), brown, pre-connected to the fixture, pre-stripped for easy wire connection
- Lifetime warranty on fixture housing

SL50-bt/SL60-bt Integrated LED:

- Wattage: 1-3
- Operating Voltage Range: 10 -14
- Lumen Output: 15 - 200
- Beam Spread: 120°
- CRI: 80
- CCT Options: Preset options for 2700K, 3000K, 4000K
- RGB Options: Unlimited Color Wheel Options with quick preset options
- Dimming: Dimming option available for every color choice
- Scenes: Customizable scene options with up to 3 colors per scene

SL60-bt

bt Step Light

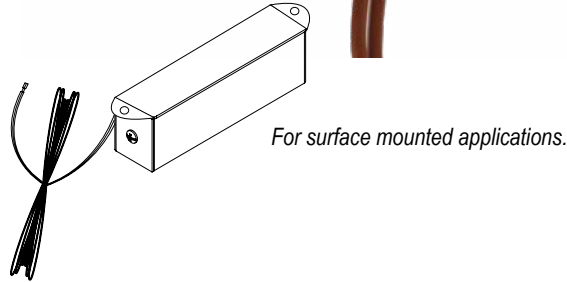

For surface mounted applications.

UL100-bt

bt Underwater Light



bt Underwater Light

- Brass fixture, aged brass finish
- Solid brass fixture base
- Solid brass shroud with water tight, sealed clear lens
- 25 Foot External Antenna
- 25 Foot underwater wire lead, pre-connected to the fixture
- Ten year warranty on integrated fixture

Integrated LED Features:

- Wattage: 4-8
- Operating Voltage Range: 10 -14
- Lumen Output: 15 - 350
- Beam Spread: 40°
- CRI: 80
- CCT Options: Preset options for 2700K, 3000K, 4000K
- RGB Options: Unlimited Color Wheel Options with quick preset options
- Dimming: Dimming option available for every color choice
- Scenes: Customizable scene options with up to 3 colors per scene

LPAR36-LED-bt

bt Drop-In PAR36 LED

- Wattage: 2-7 watts
- Operating Voltage Range: 12 -24
- Lumen Output: 280lm- 460lm
- Beam Spread: 45°
- CRI: >80
- CCT Options: Preset options for 2700K, 3000K, 4000K
- RGB Options: Unlimited Color Wheel Options with quick preset options
- Dimming: Dimming option available for every color choice
- Scenes: Customizable scene options with up to 3 colors per scene

Retrofit bt



WL200-bt



BL300-bt



connect



itTM

& forget

available in:



App Store



Google play

scan for app



Features:
Bluetooth Enabled
Astronomical Timer
Phone App Driven
Lifetime Warranty
For LED Only
DOE Compliant



it150
150 Watt Intelligent Transformer
Two Commons, Two 14V Taps
Suitable for Indoor or Outdoor use
DOE Compliant

Dimensions:
L10.875" x W5.125" x H5.25"



it300
300 Watt Intelligent Transformer
Three Commons, Three 14V Taps
Suitable for Indoor or Outdoor use
DOE Compliant

Dimensions:
L10.875" x W5.125" x H5.25"



Perfect Timer for Your Christmas Decor



Plug into 120v outlet

Plug 120v device into itimer

ITIMER
Astronomical Timer
120v Input
15 Amp Capacity
Suitable for Indoor or Outdoor use
DOE Compliant

Uses:
Retrofit traditional transformers
Holiday lighting and decor
Ponds and water features

18" OR 24" STEM

Area Light Hat Features:

*Note: Area light stems are sold separately

- Brass area light hat, aged brass finish
- Polycarbonate frosted lens
- Polycarbonate clear lens
- Rubber gaskets
- Adjustable brass collar with thumb screw
- Lifetime warranty

Area Light Stems Sold Separately:

- ALSTEM12 – 12" Stem
- ALSTEM18 – 18" Stem
- ALSTEM24 – 24" Stem
- ALSTEM60 – 60" Stem
- ALSTEMADJ – 18"-29" Stem

AL100

6.75 in (17.1 cm) Wide
2.5 in (6.4 cm) Tall

AL250

7.75 in (19.7 cm) Wide
2 in (5 cm) Tall

AL400

7.5 in (19.0 cm) Wide
4.75 in (12.1 cm) Tall

12" OR 18" STEM

AL150

6.25 in (15.9 cm) Wide
2 in (5 cm) Tall

AL300

6.25 in (15.9 cm) Wide
2.75 in (7.0 cm) Tall

AL500

5 in (12.7 cm) Wide
2.5 in (6.4 cm) Tall

AL550

3.5 in (8.9 cm) Wide
1.5 in (3.8 cm) Tall

**Choose your stem
and hat combo**

AL700

8.5 in (21.6 cm) Wide
4.5 in (11.4 cm) Tall

AL800

12 in (30.5 cm) Wide
3.5 in (8.9 cm) Tall

AL750

9 in (22.9 cm) Wide
3.75 in (9.5 cm) Tall

AL850

8 in (20.3 cm) Wide
4.25 in (10.8 cm) Tall

COMMERCIAL GRADE HATS

Features:

*Note: Area light stems are sold separately

- Brass area light hat, aged brass finish
- Polycarbonate frosted lens
- Rubber gaskets
- Adjustable brass collar with thumb screw
- Lifetime warranty

Recommended Light Stems Sold Separately:

- ALSTEM18 – 18" Stem
- ALSTEM24 – 24" Stem
- ALSTEM60 – 60" Stem

Not compatible with ALSTEM18-bt or ALSTEM12-bt


Adjustable Collar

If you need more light, thread the collar down, exposing the lamp and providing more light. Unthread the collar to reduce light or eliminate glare. Simply tighten the thumb screw to secure collar for desired spread of light.

ALSTEM24-LED

(LBIPIN-LED-200lm lamp included)
24.5"-25.5" (62.2-64.7 cm) Tall


When you need coverage for a wide area, the ALSTEM24 and a larger hat are the perfect combination.



ALSTEM18-LED

(LBIPIN-LED-200lm lamp included)
18.5"-19.5" (47-49.5 cm) Tall


Our most popular choice, the ALSTEM18 is a great pairing for just about any hat.



ALSTEM12-LED

(LBIPIN-LED-200lm lamp included)
12.5"-13.5" (31.8-34.2 cm) Tall

The best stem for reducing glare, the ALSTEM12 matches up nicely with a smaller hat.



ALSTEMADJ-LED

(LBIPIN-LED-200lm lamp included)
18"-29" (45.7-73.6 cm) Tall



Area Light Stem Features:

*Note: Area light hats are sold separately

- Brass stem, aged brass finish
- Adjustable brass collar with thumb screw (ALSTEM60 excluded)
- Ceramic bi-pin socket
- Double wire lead pre-connected to the fixture, 16 awg (UL listed), brown
 - 25 foot wire lead, pre-stripped for easy wire connection
 - 18 inch wire lead, LED connection ready
- Plastic ground stake (8.5 in; 21.6 cm length) (ALSTEM60 excluded)
- PERMAPOST ABS stake with brass cap on ALSTEM60
- Lifetime warranty on fixture housing
- Available without a lamp

ALSTEM60-LED

with PERMAPOST included
(LBIPIN-LED-200lm lamp included)
60 in (152.4 cm) Tall



TIKI

Specialty Area Light Hat
8 in (20.3 cm) Wide
11 in (27.9 cm) Tall

PERMAPOST

Heavy Duty Ground Stake



TIKI Features:

*Note: Area light stems are sold separately

- Brass area light hat, aged brass finish
- Metal snuffing cap with chain
- Wick with brass holder
- Solid brass collar
- Lifetime warranty




HOW TO LIGHT A PATHWAY

Alternate your fixtures on each side of the path so that the next fixture lights up the other side of the path. This will provide an even light output along the path as well an aesthetically pleasing lighting design. The PL-Series of fixtures include both the hat and the stem. The PL100 has a fully adjustable hat that will rotate up, down and all around. The PL200 and PL250 have a height adjustable stem and solid brass stakes. The GOLF100 is the perfect fixture for putting greens or any path that needs a wider output of light.

PL100-LED

(LBIPIN-LED-200lm lamp included)
 Fixture Height: 19.1 in. (48.5 cm)
 Fixture Length: 10 in. (25.4 cm)
 Hat Height: 4.2 in. (10.7 cm)
 Hat Diameter: 5.2 in. (13.2 cm)

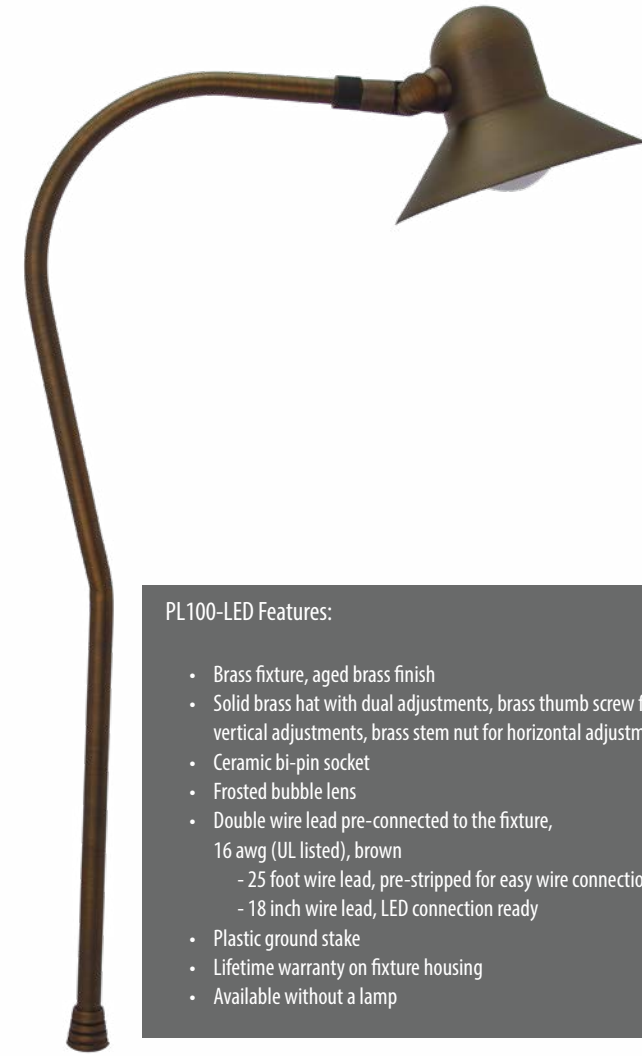

PL100-LED Features:

- Brass fixture, aged brass finish
- Solid brass hat with dual adjustments, brass thumb screw for vertical adjustments, brass stem nut for horizontal adjustments
- Ceramic bi-pin socket
- Frosted bubble lens
- Double wire lead pre-connected to the fixture, 16 awg (UL listed), brown
 - 25 foot wire lead, pre-stripped for easy wire connection
 - 18 inch wire lead, LED connection ready
- Plastic ground stake
- Lifetime warranty on fixture housing
- Available without a lamp

PL200-LED

(LBIPIN-LED-200lm lamp included)
 Fixture Height: 17-27 in. (43.1-68.5 cm)
 Hat Diameter: 7 in (17.8 cm)



PL250-LED

(LBIPIN-LED-200lm lamp included)
 Fixture Height: 17-27 in. (43.1-68.5 cm)
 Hat Diameter: 4 in (10.1 cm)




PL200-LED and PL250-LED Features:

- Solid brass area light hat
- Clear glass lens
- Adjustable brass stem, 17"-27" length, aged brass finish
- Ceramic bi-pin socket
- 25 Foot wire lead, 16 awg (UL listed), brown, pre-connected to the fixture, pre-stripped for easy wire connection
- Solid brass stake (8.5 in; 21.6 cm length)
- Lifetime warranty on fixture housing
- Available without a lamp

GOLF100-LED

(LBIPIN-LED-200lm lamp included)
 Stem Height: 23.26 in. (59 cm)
 Fixture Length: 5 in. (12.7 cm)
 Fixture Width: 3.75 in. (9.5 cm)
 Base Height: 2.25 in. (5.7 cm)

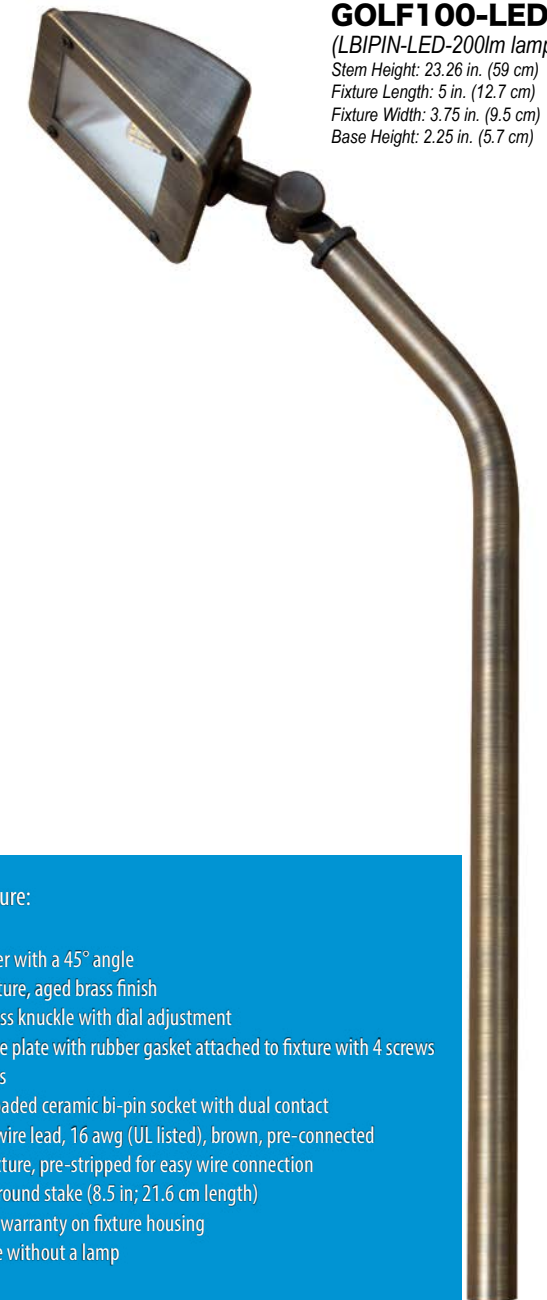



GOLF100 Feature:

- Brass riser with a 45° angle
- Brass fixture, aged brass finish
- Solid brass knuckle with dial adjustment
- Brass face plate with rubber gasket attached to fixture with 4 screws
- Clear lens
- Spring loaded ceramic bi-pin socket with dual contact
- 25 Foot wire lead, 16 awg (UL listed), brown, pre-connected to the fixture, pre-stripped for easy wire connection
- Plastic ground stake (8.5 in; 21.6 cm length)
- Lifetime warranty on fixture housing
- Available without a lamp

BULLET LIGHTS

Bullet lights can be used to uplight trees, natural structures, columns, bushes, planter areas, walls and more. Use them on a stake in low traffic areas. Anything taller than you should receive at least 310 lumens. Anything shorter than you can use a 250 lumen and lower lamp.

 Reno Laatsch, Vision Pool Co.
 visionpoolco

Bullet Light Features:

- Cast brass fixture, aged brass finish
- Cast brass knuckle with dial adjustment
- Fully adjustable brass shroud
- Ceramic bi-pin socket with lamp clip (MR11 and MR16)
- Clear glass lens (BL300 excluded)
- Double wire lead pre-connected to the fixture, 16 awg (UL listed), brown
 - 25 foot wire lead, pre-stripped for easy wire connection
 - 18 inch wire lead, LED connection ready
- Plastic ground stake (8.5 in; 21.6 cm length)
- Lifetime warranty on fixture housing
- Available without a lamp



BL50-LED
(4 watt, 250lm MR11 LED lamp included)

Fixture Length: 6 in. (15.2 cm)
Base Height: 1.75 in. (4.4 cm)
Width: 1.75 in. (4.4 cm)

BL110-LED6W
(6 watt, 410lm MR16 LED lamp included)

BL110-LED5W
(5 watt, 310lm MR16 LED lamp included)

BL110-LED4W
(4 watt, 250lm MR16 LED lamp included)

Fixture Length: 7.5 in. (19 cm)
Base Height: 1.75 in. (4.4 cm)
Width: 2.25 in. (5.7 cm)



BL300-LED10W
(10 watt, 400lm PAR36 LED Lamp included)

BL300-LED8W
(8 watt, 300lm PAR36 LED Lamp included)

BL300-LED4W
(4 watt, 250lm PAR36 LED Lamp included)

Fixture Length: 4.25 in. (10.8 cm)
Base Height: 1.75 in. (4.4 cm)
Width: 5 in. (12.7 cm)



BL200-LED6W
(6 watt, 410lm MR16 LED lamp included)

BL200-LED5W
(5 watt, 310lm MR16 LED lamp included)

BL200-LED4W
(4 watt, 250lm MR16 LED lamp included)

Fixture Length: 7.25 in. (18.4 cm)
Base Height: 1.75 in. (4.4 cm)
Width: 2.5 in. (6.3 cm)



BL900-LED6W
(6 watt, 410lm MR16 LED lamp included)

BL900-LED5W
(5 watt, 310lm MR16 LED lamp included)

BL900-LED4W
(4 watt, 250lm MR16 LED lamp included)

Fixture Length: 7.3 in. (18.5 cm)
Base Height: 1.75 in. (4.4 cm)
Width: 2.25 in. (5.7 cm)



HL100-LED6W
(6 watt MR16 LED lamp included)

HL100-LED5W
(5 watt MR16 LED lamp included)

HL100-LED4W
(4 watt MR16 LED lamp included)

Fixture Height: 6 in. (15.2 cm)
Fixture Width: 2.25 in. (5.7 cm)
Chain Length: 18 in. (45.7 cm)



The shroud on the HL100 is extendable.



HL200-LED
(LBIPIN-LED-200lm lamp included)

Fixture Height: 7.25 in. (18.4 cm)
Fixture Width: 2.25 in. (5.71 cm)
Chain Length: 18 in. (45.7 cm)

Hanging Light Features:

- Brass fixture, aged brass finish
- Cast brass base with ring
- Adjustable brass shroud on HL100
- Brass shroud with twinkle cutouts on HL200
- Ceramic bi-pin socket with lamp clip on HL100
- Ceramic bi-pin socket on HL200
- Threaded aged brass chain, 18" length
- 25 Foot wire lead, 16 awg (UL listed), brown, pre-connected to the fixture, pre-stripped for easy wire connection
- Lifetime warranty on fixture housing
- Available without a lamp



DL50-LED
(4 watt MR11 LED lamp included)

Fixture Height: 5.75 in. (14.6 cm)
Fixture Width: 1.75 in. (4.4 cm)
Base Height: 2.75 in. (7 cm)
Mounting Base Width 4.5 in (11.4 cm)



DL100-LED6W
(6 watt MR16 LED Lamp included)

DL100-LED5W
(5 watt MR16 LED Lamp included)

DL100-LED4W
(4 watt MR16 LED Lamp included)

Fixture Height: 6.5 in. (16.5 cm)
Fixture Width: 2.5 in. (6.3 cm)
Base Height: 3 in. (7.6 cm)
Mounting Base Width: 4.5 in. (11.4 cm)



DL200-LED6W
(6 watt MR16 LED Lamp included)

DL200-LED5W
(5 watt MR16 LED Lamp included)

DL200-LED4W
(4 watt MR16 LED Lamp included)

Fixture Height: 8 in. (20.3 cm)
Fixture Width: 2.5 in. (6.3 cm)
Base Height: 3 in. (7.6 cm)
Mounting Base Width: 4.5 in. (11.4 cm)

Down Light Features:

- Brass fixture, aged brass finish
- Solid brass knuckle with dial adjustment
- Brass shroud with rubber gasket
- Ceramic bi-pin socket with lamp clip
- 25 Foot wire lead, 16 awg (UL listed), brown, pre-connected to the fixture, pre-stripped for easy wire connection
- Solid brass mounting bracket, aged brass finish (DL100 and DL200)
- Brass mounting nut for precise adjustment (DL100 and DL200)
- Aged brass round mounting base (DL50)
- Mounting screws
- Lifetime warranty on fixture housing
- Available without a lamp



INDEX

AL100	AL150	AL250	AL300	AL400	AL500	AL550	AL700	AL750	AL800	AL850	TIKI				
															
GOLF100	PL100 PL100-bt	PL200	PL250	PL300-bt	BOLLARD100	BL50	BL110	BL200 BL200-BT	BL300 BL300-bt	BL400-bt	BL900	FL50 FL50-bt	FL100	FL200 FL200-bt	UL100 UL100-bt
															
GL100 GL100-bt	GL150 GL150-bt	GL160 GL160-bt	GL170 GL170-bt	GL180 GL180-bt	GL190 GL190-bt	GL300 GL300-bt	GL310 GL310-bt	GL350 GL350-bt	GL360 GL360-bt	GL370 GL370-bt	GL380 GL380-bt	GL390 GL390-bt	WL300	WL100	
															
HL100	HL200	DL50	DL100	DL200 DL200-bt	POST100	WS100	WS200	WS300	SL50 SL50-bt	SL100	SL150	SL200/SL25-LED/SL25-bt	SL65-LED	SL75-LED	SL85-LED
															

bt PRODUCTS.....	2-11
INTELLIGENT DEVICES	12-13
AREA LIGHTS	14-17
PATH LIGHTS.....	18-19
BULLET LIGHTS.....	20-21
DOWN LIGHTS.....	22-23
TABLE OF CONTENTS.....	24-25
FLOOD LIGHTS.....	26
IN -GROUND LIGHTS.....	28-31
STEP LIGHTS.....	32-35
POST LIGHT.....	36
BOLLARD LIGHT.....	36
WALL SCONCE LIGHTS.....	38
UNDERWATER LIGHT.....	39
DEMOKITS.....	40
TRANSFORMERS.....	41
ACCESSORIES.....	43
LED LAMPS.....	44
WARRANTY.....	47
REFERENCE PAGE.....	47

FLOOD LIGHTS



FL50-LED
(LBIPIN-LED-200lm lamp included)
Fixture Height: 2 in. (5.0 cm)
Fixture Width: 4 in. (10.1 cm)
Fixture Depth: 2.25 in. (5.7 cm)
Base Height: 1.5 in. (3.8 cm)



FL50-FFP
Frosted face plate sold separately



FL100-LED
(LBIPIN-LED-200lm lamp included)
Fixture Height: 5 in. (12.7 cm)
Fixture Width: 3.75 in. (9.5 cm)
Base Height: 2.25 in. (5.7 cm)



FL100-FFP
Frosted face plate sold separately



FL200-LED6W
(6 watt MR16 LED lamp included)

FL200-LED5W
(5 watt MR16 LED lamp included)

FL200-LED4W
(4 watt MR16 LED lamp included)

Fixture Height: 4.25 in. (10.8 cm)
Fixture Width: 5.25 in. (13.3 cm)
Fixture Depth: 6 in. (15.2 cm)
Base Height: 3 in. (7.6 cm)

Flood Light Features:

- Brass fixture, aged brass finish
- Solid brass knuckle with dial adjustment
- Brass face plate with rubber gasket
- Ceramic bi-pin socket
- Clear lens (Optional frosted lens available)
- Double wire lead pre-connected to the fixture, 16 awg (UL listed), brown
 - 25 foot wire lead, pre-stripped for easy wire connection
 - 18 inch wire lead, LED connection ready
- Plastic ground stake (8.5 in; 21.6 cm length)
- Lifetime warranty on fixture housing
- Available without a lamp



IN-GROUND LIGHTS

GL-BASE

3.5 in. (8.9 cm) Width at Base Top
2.38 in. (6.0 cm) Width at Base Bottom
3.5 in (8.9 cm) Tall

GL100-LED6W

(6 watt MR16 LED lamp included)



GL100-LED5W

(5 watt MR16 LED lamp included)

GL100-LED4W

(4 watt MR16 LED lamp included)

GL150-LED6W

(6 watt MR16 LED lamp included)



GL150-LED5W

(5 watt MR16 LED lamp included)

GL150-LED4W

(4 watt MR16 LED lamp included)

GL160-LED6W

(6 watt MR16 LED lamp included)



GL160-LED5W

(5 watt MR16 LED lamp included)

GL160-LED4W

(4 watt MR16 LED lamp included)

GL180-LED6W

(6 watt MR16 LED lamp included)



GL180-LED5W

(5 watt MR16 LED lamp included)

GL180-LED4W

(4 watt MR16 LED lamp included)

GL190-LED6W

(6 watt MR16 LED lamp included)



GL190-LED5W

(5 watt MR16 LED lamp included)

GL190-LED4W

(4 watt MR16 LED lamp included)

GL300-BASE

4.87 in. (12.3 cm) Width at Base Top
3.5 in. (8.9 cm) Width at Base Bottom
4.75 in. (12 cm) Base Height
0.5 in. (1.2 cm) Lip Height



GL300-LED6W

(6 watt MR16 LED lamp included)

GL300-LED5W

(5 watt MR16 LED lamp included)

GL300-LED4W

(4 watt MR16 LED lamp included)



GL310-LED6W

(6 watt MR16 LED lamp included)

GL310-LED5W

(5 watt MR16 LED lamp included)

GL310-LED4W

(4 watt MR16 LED lamp included)



GL350-LED6W

(6 watt MR16 LED lamp included)

GL350-LED5W

(5 watt MR16 LED lamp included)

GL350-LED4W

(4 watt MR16 LED lamp included)



GL360-LED6W

(6 watt MR16 LED lamp included)

GL360-LED5W

(5 watt MR16 LED lamp included)

GL360-LED4W

(4 watt MR16 LED lamp included)



GL370-LED6W

(6 watt MR16 LED lamp included)

GL370-LED5W

(5 watt MR16 LED lamp included)

GL370-LED4W

(4 watt MR16 LED lamp included)



GL360-LED6W

(6 watt MR16 LED lamp included)

GL360-LED5W

(5 watt MR16 LED lamp included)

GL360-LED4W

(4 watt MR16 LED lamp included)



GL370-LED6W

(6 watt MR16 LED lamp included)

GL370-LED5W

(5 watt MR16 LED lamp included)

GL370-LED4W

(4 watt MR16 LED lamp included)

Faceplate Options:

GL160



Grated Top

GL170



Opposing Sides
Light Output

GL180



180° Light Output

GL190



360° Light Output

Faceplate Options:

GL310



Domed Top

GL360



Grated Top

GL370



Opposing Sides
Light Output

GL380



180° Light Output

GL390



360° Light Output

GL300 Series Features:

- Solid brass faceplate with five screws
- Clear glass lens
- ABS fixture base with rubber gasket seal
- Ceramic bi-pin socket with adjustable swivel
- 5' wire lead, (UL Listed), black, pre-connected to the fixture, pre-stripped for easy wire connection
- Lifetime warranty on fixture housing
- Available without a lamp

GL100 Series Features:

- Brass fixture, aged brass finish
- Clear convex lens
- Solid brass fixture base
- Solid brass faceplate with four screws
- Ceramic bi-pin socket
- Double wire lead pre-connected to the fixture, 16 awg (UL listed), brown
 - 25 foot wire lead, pre-stripped for easy wire connection
 - 18 inch wire lead, LED connection ready
- Lifetime warranty on fixture housing
- Available without a lamp

WELL LIGHTS

WL300-LED6W

(6 watt MR16 LED lamp included)

WL300-LED5W

(5 watt MR16 LED lamp included)

WL300-LED4W

(4 watt MR16 LED lamp included)

Fixture Height: 7.5 in. (19.0 cm)
Can Diameter: 5.75 in. (14.6 cm)
Grate Diameter: 6.5 in. (16.5 cm)



The height of the lamp housing in the WL300 is easily adjustable.



WL100-LED10W

(10 watt PAR36 LED lamp included)

WL100-LED8W

(8 watt PAR36 LED lamp included)

WL100-LED4W

(4 watt PAR36 LED lamp included)

Fixture Height: 8.75 in. (22.2 cm)
Can Diameter: 5.5 in. (13.9 cm)
Grate Diameter: 6 in. (15.2 cm)



WL200-LED10W

(10 watt PAR36 LED lamp included)

WL200-LED8W

(8 watt PAR36 LED lamp included)

WL200-LED4W

(4 watt PAR36 LED lamp included)

Fixture Height: 8.75 in. (22.2 cm)
Can Diameter: 5.5 in. (13.9 cm)
Grate Diameter: 5.5 in. (13.9 cm)



CGWL01-LED10W

(10 watt PAR36 LED lamp included)

CGWL01-LED8W

(8 watt PAR36 LED lamp included)

CGWL01-LED4W

(4 watt PAR36 LED lamp included)

Fixture Height: 8.25 in. (20.9 cm)
Can Diameter: 5.5 in. (13.9 cm)
Grate Diameter: 6.75 in. (17.1 cm)





TAPE-LED-5FT

Integrated LED Step Light
Can be cut down to length
LED strip, 5 Feet
• Watts: 5w
• Light Output: 350 lm (Lumens)

Per 1 Foot:
• Watts: 1w
• Light Output: 70 lm (Lumens)

Can be Cut Down to Size



TAPE-LED-15FT

Integrated LED Step Light
Can be cut down to length
LED strip, 15 Feet
• Watts: 15w
• Light Output: 1050 lm (Lumens)

Per 1 Foot:
• Watts: 1w
• Light Output: 70 lm (Lumens)

TAPE-LED-15FT-LL

Lower Lumen Output
• Watts: 8w
• Light Output: 675 lm (Lumens)

Per 1 Foot:
• Watts: 0.5w
• Light Output: 45 lm (Lumens)

TAPE-LED-30FT

Integrated LED Step Light
Can be cut down to length
LED strip, 30 Feet
• Watts: 30w
• Light Output: 2,100 lm (Lumens)

Per 1 Foot:
• Watts: 1w
• Light Output: 70 lm (Lumens)



SL65-LED

Integrated LED Step Light
4 in (10.1 cm) Wide
3.5 in (8.9 cm) Deep

LED strip, 4 chips
• Watts: 2w
• Light Output: 110 lm (Lumens)



SL75-LED

Integrated LED Step Light
6.8 in (17.2 cm) Wide
3.5 in (8.9 cm) Deep

LED strip, 8 chips
• Watts: 3w
• Light Output: 300 lm (Lumens)



SL85-LED

Integrated LED Step Light
12 in (30.4 cm) Wide
3.5 in (8.9 cm) Deep

LED strip, 12 chips
• Watts: 4w
• Light Output: 380 lm (Lumens)

LEDGE LIGHTS

CHOOSE THE PERFECT SIZE

The 7" SL75-LED is our most popular and works in countless applications.

The 4" SL65-LED will work great on shorter walls and corners.

The 12" SL85-LED is ideal for taller walls and will provide a wider coverage area.

SL-LED Series Features:

- Brass fixture, aged brass finish
- Mounting bracket, stainless steel, aged brass finish
- Optional frosted lens included
- Optional glare shield included
- 10' wire lead, 16 awg (UL Listed), brown, pre-connected to the fixture, pre-stripped for easy wire connection
- 10 Year warranty on LED components and fixture housing

TAPE LIGHTS

TAPE-LED Features:

- 5 Foot LED strip
- Mounting clips included
- 10' wire lead, 16 awg (UL Listed), brown, pre-connected to the fixture, pre-stripped for easy wire connection
- 10 Year warranty on LED components and fixture housing

LED strip

- Beam Angle: 120°
- Beam Spread: Flood
- Color: Warm White
- Color Temperature: 2700K
- Operating Voltage: 10.8Vac - 15Vac
- CRI: Ra>80
- Rated Hours: 30,000
- Ambient Operating Temperature: -40°C ~ +85°C

VERSATILITY



Mounting bracket is removable for surface mounted applications.
Optional frosted lens is included with the fixture.



Glare shield included with every SL65-LED, SL75-LED and SL85-LED



SL65-LED with glare shield installed.

STEP LIGHTS

SL50 Features:

- Brass fixture, aged brass finish
- Ceramic bi-pin socket
- Frosted lens
- 25 Foot wire lead, 16 awg (UL listed), brown, pre-connected to the fixture, pre-stripped for easy wire connection
- Lifetime warranty on fixture housing

SL50-LED

(LBIPIN-LED-200lm lamp included)

Fixture Depth: 3.5 in. (8.9 cm)
Fixture Width: 5 in. (12.7 cm)
Lamp Housing Height: 1.5 in. (3.8 cm)
Lamp Housing Depth: 1.25 in. (3.1 cm)



SL25-LED

Integrated Surface Mount Step Light

6 in (15.2 cm) Wide
2.875 in (7.3 cm) Tall



Mounts directly onto desired surface

(Back View)




(Side View)



SL35-LED

Integrated Surface Mount Step Light

9.5 in (24.1 cm) Wide
2.875 in (7.3 cm) Tall

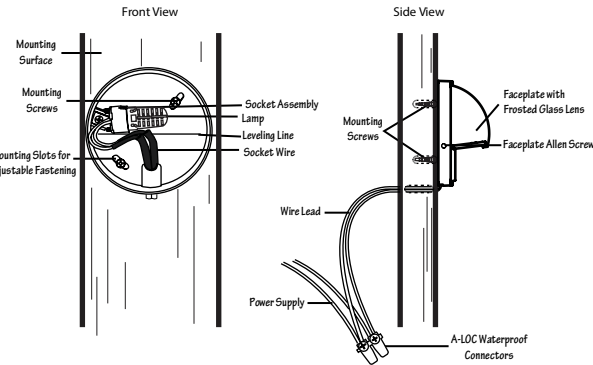

SL100-LED

(LBIPIN-LED-200lm lamp included)

Fixture Depth: 1.75 in. (4.4 cm)
Fixture Diameter: 3.4 in. (8.6 cm)

Fits a Standard 4" Post

SL150-LED

(LBIPIN-LED-200lm lamp included)

Fixture Depth: 2 in. (5.0 cm)
Fixture Diameter: 3.875 in. (9.8 cm)



SL100/SL150 Features:

- Brass fixture, aged brass finish
- Solid brass face plate with securing hex screws
- Allen wrench tool to tighten hex screws
- Base plate with adjustable mounting guides
- Ceramic bi-pin socket
- Frosted lens
- 25 Foot wire lead, 16 awg (UL listed), brown, pre-connected to the fixture, pre-stripped for easy wire connection
- Mounting hardware screws
- Two extra adjusting hex face plate screws
- Mounting template
- Lifetime warranty on fixture housing
- Available without a lamp

SL200 and SL300 Features:

- Brass fixture, aged brass finish
- Solid brass face plate with securing screws
- Ceramic bi-pin socket
- Mud installation box included
- 25 Foot wire lead, 16 awg (UL listed), brown, pre-connected to the fixture, pre-stripped for easy wire connection
- Optional metal set box included
- Lifetime warranty on fixture housing
- Available without a lamp

(Back View)



(Side View)



SL200-LED

(LBIPIN-LED-200lm lamp included)

SL300-LED

(Two LBIPIN-LED-200lm lamps included)

SL25-LED/SL35-LED Features:

- Brass fixture, aged brass finish
- Solid brass louvered face plate with frosted lens
- 25' Wire lead
- 10 Year warranty on LED components and fixture housing

SL25-LED Integrated LED:

- Watts: 7w
- Lumens: 570lm*
- Color: Warm White
- Color Temperature: 2700K
- Operating Voltage: 8Vac-15Vac
- CRI: Ra>80
- Rated Hours: 30,000 Hours
- Ambient Operating Temperature: -40°C ~ +85°C

SL35-LED Integrated LED:

- Watts: 13w
- Lumens: 1,000lm*
- Color: Warm White
- Color Temperature: 2700K
- Operating Voltage: 8Vac-15Vac
- CRI: Ra>80
- Rated Hours: 30,000 Hours
- Ambient Operating Temperature: -40°C ~ +85°C

*Louvered face plate greatly reduces glare



Post Light Features:

- Brass post light, aged brass finish
- Frosted lens panels
- Ceramic bi-pin socket
- Mounting hardware
- 25 foot wire lead, 16 awg(UL Listed), brown, pre-connected to the fixture, pre-stripped for easy wire connection
- Lifetime warranty on fixture housing
- Available without a lamp

POST100-LED6W
(6 watt MR16 LED lamps included)

POST100-LED5W
(5 watt MR16 LED lamps included)

POST100-LED4W
(4 watt MR16 LED lamps included)

Body Width: 7.75 in. (19.7 cm)
Body Depth: 7.75 in. (19.7 cm)
Total Height: 12 in. (30.5 cm)
Hat Width: 11 in. (27.9 cm)




BOLLARD100-LED

(LBIPIN-LED-350lm lamp included)

Base Width: 5 in. (12.7 cm)
Total Height: 29.5 in. (74.9 cm)
Top Height: 7.5 in. (19.0 cm)
Top Width: 6 in. (15.2 cm)

Bollard Features:

- Solid brass three-tiered cover, aged brass finish
- Aluminum post, aged brass finish
- Clear and frosted polycarbonate lens with gaskets
- Ceramic bi-pin socket
- Aluminum mounting base with hardware
- 36 inch wire lead, 16 awg(UL Listed), brown, pre-connected to the fixture, pre-stripped for easy wire connection
- Plastic ground stake (8.5 in; 21.6 cm length) (optional)
- Lifetime warranty on fixture housing
- Available without a lamp

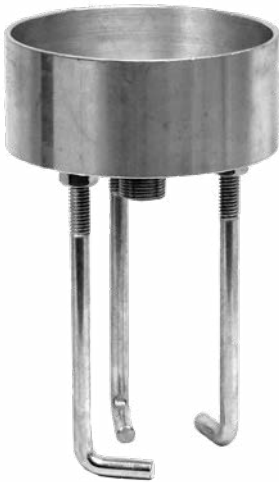

WALL SCONCE LIGHTS



WS100-LED
(Two LBIPIN-LED-200lm lamps included)

Fixture Height: 6 in. (15.2 cm)
Fixture Width: 3 in. (7.6 cm)
Fixture Depth: 2 in. (5.0 cm)



WS200-LED
(Two LBIPIN-LED-200lm lamps included)

Fixture Height: 9 in. (22.8 cm)
Fixture Width: 6 in. (15.2 cm)
Fixture Depth: 3.5 in. (8.9 cm)



WS300-LED6W
(Two 6 watt MR16 LED lamps included)

WS300-LED5W
(Two 5 watt MR16 LED lamps included)

WS300-LED4W
(Two 4 watt MR16 LED lamps included)

Fixture Height: 8 in. (20.3 cm)
Fixture Width: 2.25 in. (5.7 cm)
Fixture Depth: 3.5 in. (8.9 cm)



UL100-LED6W
(6 watt MR16 LED lamp included)

UL100-LED5W
(5 watt MR16 LED lamp included)

UL100-LED4W
(4 watt MR16 LED lamp included)

Fixture Height: 5 in. (12.7 cm)
Fixture Width: 4.25 in. (10.8 cm)
Fixture Depth: 4.25 in. (10.8 cm)



Wall Sconce Features:

- Brass fixture, aged brass finish
- Frosted top lens (WS100 and WS200)
- Clear glass top and bottom lenses (WS300)
- Dual Ceramic bi-pin socket
- 25 Foot wire lead, 16 awg (UL listed), brown, pre-connected to the fixture, pre-stripped for easy wire connection
- Lifetime warranty on fixture housing
- Available without a lamp



UNDERWATER LIGHTS

UL100 Features:

- Brass fixture, aged brass finish
- Solid brass fixture base
- Solid brass shroud with water tight, sealed clear lens
- Ceramic bi-pin socket
- 25 Foot underwater wire lead, pre-connected to the fixture (also available with 50 Foot wire lead)
- UL1838 Certified underwater landscape luminaire
- Lifetime warranty on fixture housing
- Available without a lamp

DEMO KITS

Quick connects on every wire lead,
for an easy and fast connection



DEMOKIT8-bt Includes:

- (6) BL200-bt
- (2) ALSTEM12-bt
- (2) AL100 Hats
- (1) bt-RE
- (1) TF150 Transformer
- (2) Wire Splitters
- (12) Extra Connectors
- Storage Case

DEMOKIT8 Includes:

- (6) BL200-LED4W
- (2) ALSTEM12-LED
- (2) AL100 Area Light Hats
- (1) TF150 Transformer
- (2) Wire Splitters
- (12) Extra Connectors
- Storage Case

Demo Kit Features:

- Our industry first double wire leads: fixtures with two 16 awg (UL Listed) brown wire leads pre-connected to the fixture, one 18" and one 25' in length.
- Quick connecting adapters at each wire end making connections fast and easy (not intended for in ground burial)
- A TF150 transformer with an 18" wire lead pre-connected with quick connect adapter
- A compact storage case making the kit easy to store and transport
- Extra quick connectors
- Door Hangers

DEMOKIT8-bt
(bt Demonstration Kit)

DEMOKIT8
(LED Demonstration Kit)



GREAT SALES TOOL

A demo kit is a great way to expand your lighting business. Setup the kit for the customer to show how great lighting enhances the way they experience their property at night. Expand your demokit to show different applications of lighting.



(XF150 pictured)

XF150

150 watt Transformer

COM1 COM2 12 13 14 15

Dimensions:

L14.37" x W4.72" x H5.12"

XF300

300 watt Transformer

COM1 COM2 12 13 14 15

Dimensions:

L15.98" x W7.28" x H5.12"

XF600

600 watt Transformer

COM1 12 13 14 15 16 17 18 COM2

Dimensions:

L15.98" x W7.28" x H5.12"



TF200

200 Watt Stainless Steel Transformer Featuring:

- One 12 Volt tap only
- Built in photocell/timer
- DOE Compliant

TF300

300 Watt Stainless Steel Transformer Featuring:

- Multiple Taps (12v-15v)
- Built in photocell/timer
- DOE Compliant

XF TRANSFORMER ACCESSORIES

PC

Photocell



TIMER

Mechanical Timer



CONNECTION ACCESSORIES

A-LOC-50

Waterproof Wire Connectors
(Container of 50 pieces)





RMB
Aged Brass Round Mounting Base



GUTTERMOUNT
Aged Brass Gutter Mount



T-ADAPTER
"T" Extension Accessory



L-ADAPTER
"L" Extension Accessory



RISERADJ-BRASS
Adjustable Brass Riser



RISER18
18" Aged Brass Riser



RISER12
12" Aged Brass Riser



RISER6
6" Aged Brass Riser



PERMAPOST
Heavy Duty Ground Stake



ACCESSORIES

LBIPIN-LED-200lm

2.5 watt bipin, 200 lumens
IP67 certified



LBIPIN-LED-250lm

3 watt bipin, 250 lumens
IP67 certified

LBIPIN-LED-350lm

3.5 watt bipin, 350 lumens
IP67 certified

L3156-LED-200lm

2.5 watt 3156 wedge base, 200 lumens
IP67 certified



L3156-LED-250lm

3 watt 3156 wedge base, 250 lumens
IP67 certified

LBA15S-LED-200lm

2.5 watt single bayonet, 200 lumens
IP67 certified



LBA15D-LED-200lm

2.5 watt double bayonet, 200 lumens
IP67 certified



L921T5-LED-200lm

2.5 watt T5 wedge base, 200 lumens
IP67 certified



IP67: Lamps are dust tight and can be submerged in up to one meter of water

DROP-IN LED LAMPS



LPAR36-LED-4W-F

4 watt PAR36, 250 lumens, 20 degree

LPAR36-LED-4W-WF

4 watt PAR36, 250 lumens, 40 degree
(20 watt PAR36 equivalent)



LPAR36-LED-8W-F

8 watt PAR36, 300 lumens, 20 degree

LPAR36-LED-8W-WF

8 watt PAR36, 300 lumens, 40 degree
(35 watt PAR36 equivalent)



LPAR36-LED-10W-F

10 watt PAR36, 400 lumens, 30 degree

LPAR36-LED-10W-WF

10 watt PAR36, 400 lumens, 45 degree
(50 watt PAR36 equivalent)

IP66: Lamps are dust tight and can withstand powerful water jets from any direction.



LMR11-LED-4W-F

4 watt MR11, 175 lumens

Flood, 45 degree

(20 watt MR11 equivalent)



LMR16-LED-4W-F

4 watt MR16, 250 lumens

Flood, 45 degree

(20 watt MR16 equivalent)

LMR16-LED-4W-2700K

2700K Color Temperature


LMR16-LED-4W-WF

Wide Flood, 60 degree



LMR16-LED-4W-NS

Narrow Spot, 15 degree



LMR16-LED-250lm

Enclosed Housing

Recommended for Down Light Series



LMR16-LED-5W-F

5 watt MR16, 310 lumens

Flood, 45 degree

(35 watt MR16 equivalent)

LMR16-LED-5W-2700K

2700K Color Temperature

LMR16-LED-5W-WF

Wide Flood, 60 degree



LMR16-LED-5W-NS

Narrow Spot, 15 degree



LMR16-LED-310lm

Enclosed Housing

Recommended for Down Light Series



LMR16-LED-6W-F

6 watt MR16, 410 lumens

Flood, 45 degree

(50 watt MR16 equivalent)

LMR16-LED-6W-2700K

2700K Color Temperature



Moonshine Outdoor Lighting



@moonshineoutdoor



Elliot Fuerniss Photography


@elliottfuerniss

ALLIANCE

OUTDOOR LIGHTING


Double Wire Lead

- 25' and 18" Wire Leads
- Save Time and Money

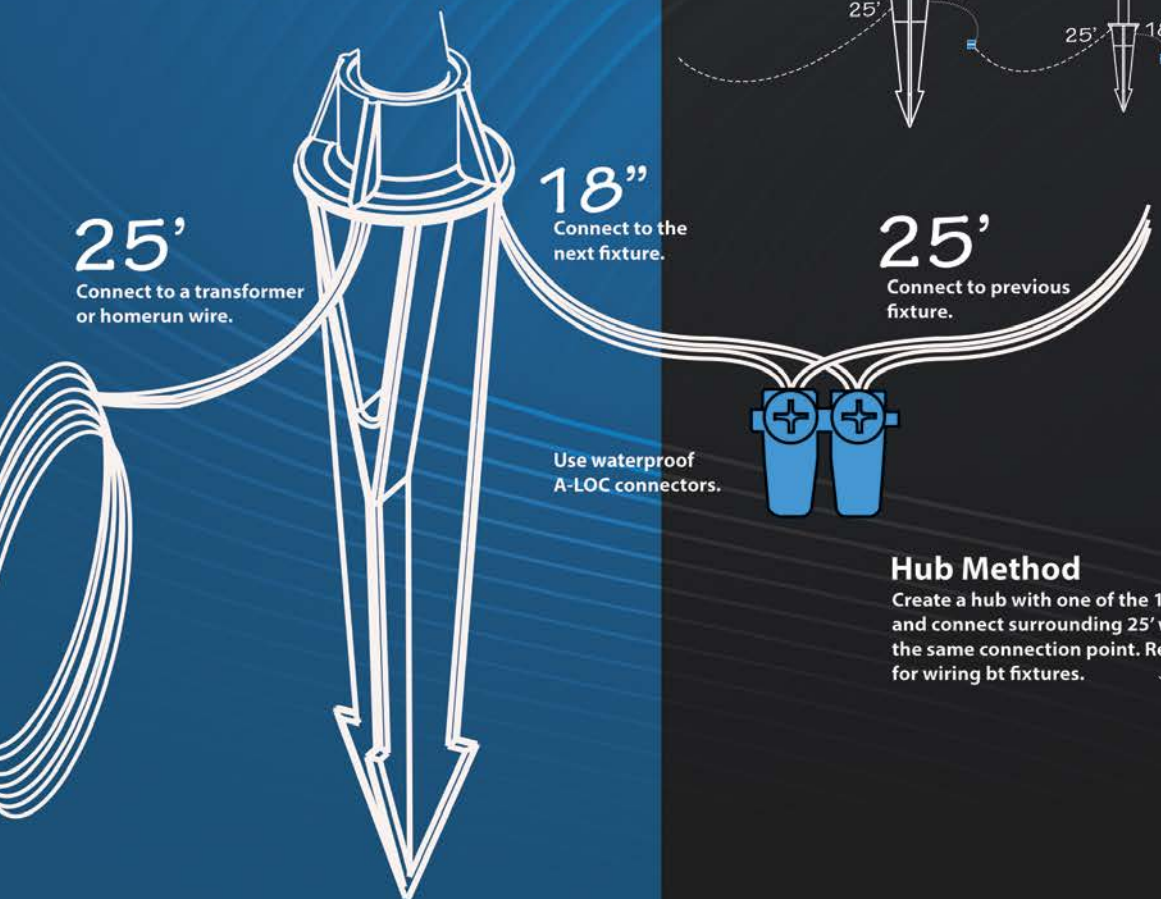

Industry's First Double Wire Lead System

Pre-installed on most ALLIANCE in-ground fixtures.

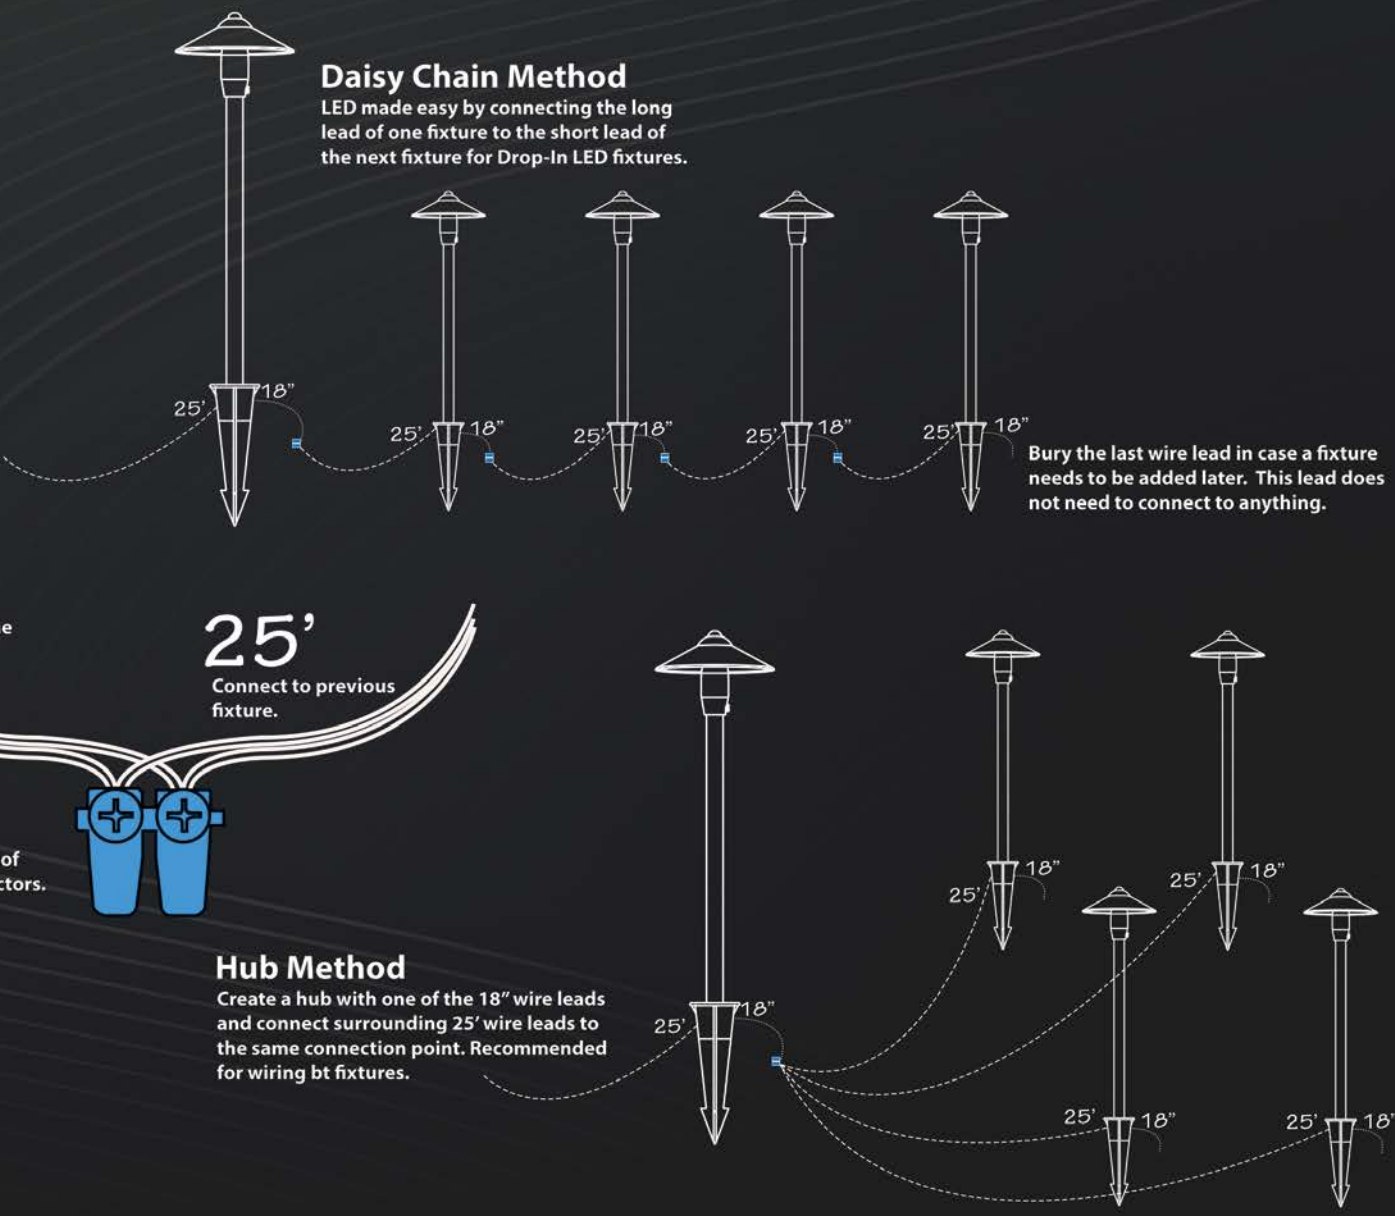

Welcome to the ALLIANCE Family

Lighting Information:

Install Date: _____

Wiring Method:

☐ Daisy-Chain/In Series

☐ Hub System

☐ Other _____

Type and Quantity of Fixtures Used:

☐ bt Fixtures _____

☐ LED Drop-In Fixtures _____

☐ Hardscape Fixtures _____

Type, Size and Quantity of Transformers Used:

<input type="checkbox"/> it Transformer	<input type="checkbox"/> 150 watt _____	How many wire runs? _____
<input type="checkbox"/> XF Transformer	<input type="checkbox"/> 200 watt _____	
<input type="checkbox"/> TF Transformer	<input type="checkbox"/> 300 watt _____	
	<input type="checkbox"/> 600 watt _____	

Wiring notes: _____

bt System Information:

☐ Secured Network Name(s) _____

☐ # of bt-RE Range Extenders and locations _____

Notes: _____

Installer Information:


PRODUCT WARRANTY:

Alliance Outdoor Lighting warrants its products against defects in material and workmanship. Without charge, Alliance Outdoor Lighting will either repair or replace (Alliance Outdoor Lighting reserves the right to decide between repair or replacement) any properly installed Alliance Outdoor Lighting product that fails under normal operating conditions within the specified warranty period. Damage due to acts of nature, such as, but not limited to, lightning, flooding, explosions and earthquakes, are not covered.

- **Brass and Copper fixtures:**
All have a lifetime warranty for all castings and housings.
- **IT Series Transformers and iTimer:**
All IT series transformers carry a lifetime warranty on enclosures. All transformer windings carry a lifetime warranty.
- **XF Series Transformers:**
All XF series transformers carry a lifetime warranty on enclosures. All transformer windings carry a lifetime warranty.
- **TF Series Transformers:** Two year warranty.
- **bt and Integrated LED fixtures:** All Alliance LED integrated fixtures carry a 10 year warranty.
- **bt and LED Lamps:** Ten year warranty.
- **Timers and Photocells:** Do not carry a warranty.

All products are warranted from the date of invoice, provided it is returned to the Alliance Outdoor Lighting distributor from where it is purchased. Our factory inspection determines it to be defective under the terms of the warranty. This warranty covers only equipment manufactured by Alliance Outdoor Lighting and does not extend to transportation, installation, labor compensation, or replacement charges, nor does it apply to any equipment of another manufacturer used in conjunction with Alliance Outdoor Lighting equipment.

NOTE: All Alliance Outdoor Lighting products are designed to be repaired in the field by a qualified lighting installer. All service parts are readily available and we encourage field repairs as a significant cost and labor savings which can be realized by the installer. All warranted components, as stated in the above warranty, which are installed in the field, will be honored.



Need Help?

Contact your contractor or installer.
email: techsupport@allianceoutdoorlighting.com
Scan the QR code to visit our online video library.
www.allianceoutdoorlighting.com/videolibrary



West Coast Hub: Temecula, California
East Coast Hub: Sanford, Florida
www.allianceoutdoorlighting.com