


Project:	
Type:	

## Model: HL100 (MR16 Hanging Light)

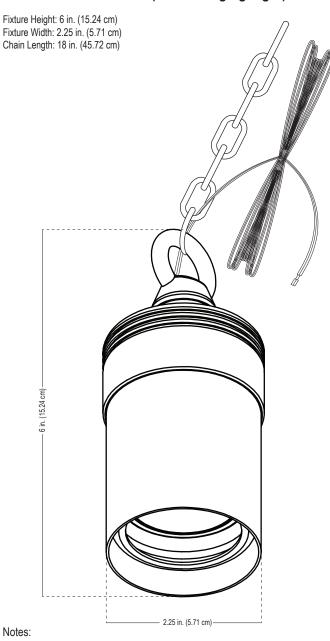

#### Specifications and Features:

**Body:** Brass fixture, aged brass finish **Base:** Cast brass base with ring **Shroud:** Adjustable brass shroud

Socket: Spring loaded ceramic bi-pin socket with dual contact and lamp clips

Wire: 25' Foot wire lead, 16 awg (UL listed), brown, Pre-connected to the fixture, Pre-stripped for

easy wire connection

**Chain:** Threaded aged brass chain, 18" length **Warranty:** Lifetime warranty on fixture housing

**Certifications:** Complies with the requirements of UL-1838 and CAN/CSA-C22.2 No. 250.7. Identified with the ETL and cETL Listed Mark.



#### Lamp Options

Model #	Base Type	Angle	Wattage	Lumen Output
LMR16-LED-4W-NS	MR16	15°	4w	250lm
LMR16-LED-4W-F	MR16	45°	4w	250lm
LMR16-LED-4W-WF	MR16	60°	4w	250lm
LMR16-LED-5W-NS	MR16	15°	5w	310lm
LMR16-LED-5W-F	MR16	45°	5w	310lm
LMR16-LED-5W-WF	MR16	60°	5w	310lm
LMR16-LED-6W-F	MR16	45°	6w	400lm
LMR16-35-36-XH (Halogen)	MR16	45°	35w	310lm


LED Ordering Guide: Model-Lamp Wattage-Lamp Angle Example:HL100-LED-5W-F




Project:
Type:

# **MR16 LED Photometric Comparisons**

### LMR16-LED-6W-F






LMR16-LED-5W-NS


LMR16-LED-5W-F (also available in Blue, Red, Green and Amber


LMR16-LED-5W-WF














LMR16-LED-4W-NS

LMR16-LED-4W-F

LMR16-LED-4W-WF



13'1"

9'10"

