


ALLIANCE

Specification Sheet

Model: PL250 (Path Light)

Fixture Height: 17-27 in. (43.0-69.0 cm)
 Stem Diameter: 1.6 in. (4.1 cm)
 Hat Diameter: 4 in. (10.16 cm)

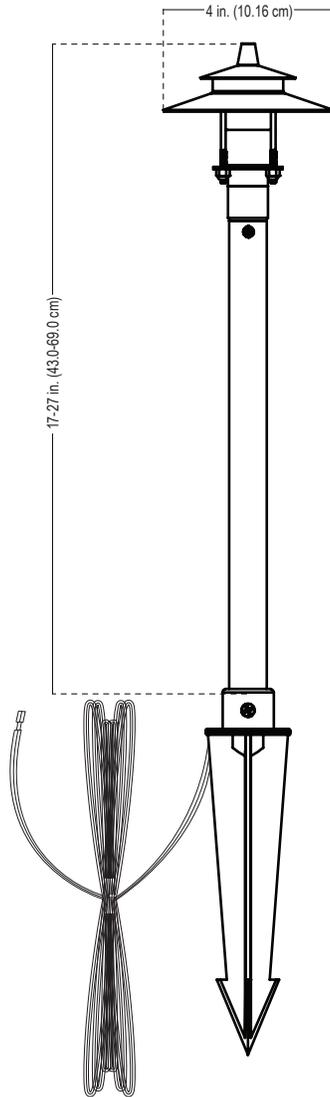

Notes:

Project:
Type:

Specifications and Features:

Stem: Adjustable brass stem, 17"-27" length, aged brass finish

Hat: Solid brass area light hat

Socket: Spring loaded ceramic bi-pin socket with dual contact

Lens: Clear glass lens

Wire: 25' Foot wire lead, 16 awg (UL listed), brown, Pre-connected to the fixture, Pre-stripped for easy wire connection

Stake: Solid brass stake, attached to the fixture with a set screw (8.5 in; 21.6 cm length)

Warranty: Lifetime warranty on fixture housing

Certifications: Complies with the requirements of UL-1838 and CAN/CSA-C22.2 No. 250.7. Identified with the ETL and cETL Listed Mark.




Lamp Options

Model #	Base Type	Wattage	Lumen Output
LBIPIN-LED-200LM	Bipin/G4	2.5w	200lm
LBIPIN-LED-250LM	Bipin/G4	3w	250lm

LED Ordering Guide: Model-LED
 Example: PL250-LED

Project:
Type:

Model: LBIPIN-LED-200LM (200 LUMEN BIPIN LED)

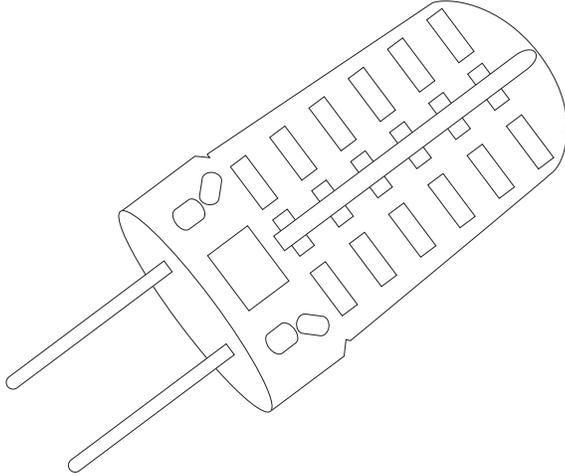

Specifications and Features:

Watts: 2.5

Base Type: G4/BiPin

Light Output: 200 lumens

Color: Warm White

Color Temperatures: 2700K

Operating Voltage: 8-24v

CRI: ~80

LED Chip Qty: 48 Pieces

Rated Hours: >25,000 hrs

Ambient Operating Temperature: -20°C - +50°C

Transformer Compatibility: Must be powered by magnetic transformer

Warranty: Five year limited warranty on LED components

Lamp Color Options

Model #	Color	Color Temp.	Base Type	Wattage	Lumen Output
LBIPIN-LED-200LM	Warm White	2700K	BIPIN/G4	2.5w	200lm

Notes: